




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2		F	ECR-13-001941	13Feb13	LD	JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	23 AWG Solid
	Ø RANGE in mm	0,546 <= Ø < 0,610
	MATERIAL	COPPER
	PLATING	BARE
	ELONGATION	15% PER EN 50288-1
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,35
DRAIN WIRE	Ø RANGE	0,4 - 0,55
	MATERIAL	COPPER
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	-
	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D)	7,3
PULLING FORCE	MAX.	100 N

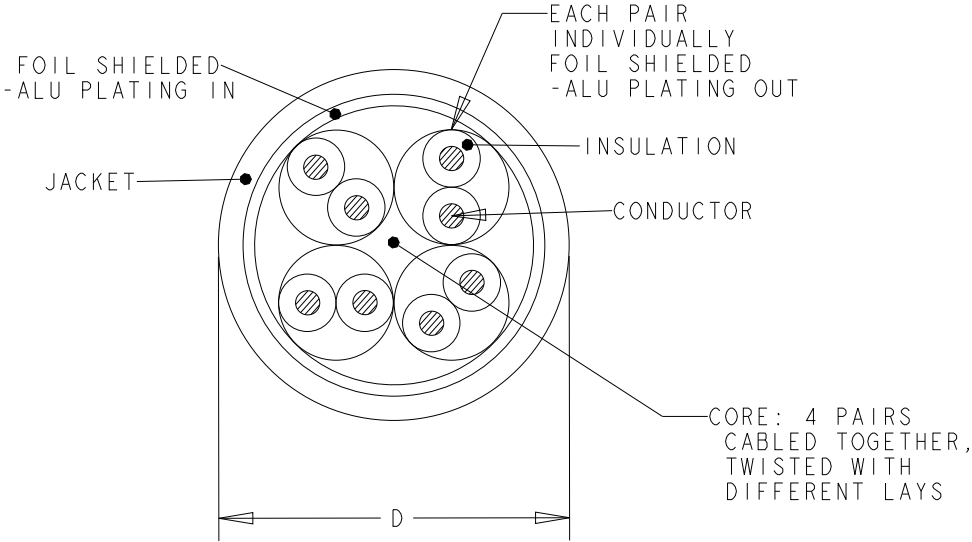

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT6 F/FTP SOLID PR04 AWG23 LSZH
3. CABLE COLORED TYPES UPON REQUEST.

GREEN	1000	REEL	1711007-3
WHITE	1000	REEL	1711007-2
WHITE	500	REEL	1711007-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. de Dios 13Feb13	<div>TE Connectivity</div>			
DIMENSIONS: mm		CHK M. Maqueda 13Feb13				
		APVD J. Sanabra 13Feb13	NAME CABLE, CAT6, F/FTP, PiMF250 COMPACT, SÓLID, PR04, AWG23, LSZH			
		PRODUCT SPEC -				
MATERIAL -		APPLICATION SPEC -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT -	A3	-	C-1711007	-
FINISH -			CUSTOMER DRAWING			
			SCALE NTS	SHEET 1	OF 1	REV F