

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	INITIAL RELEASE	11JUNE2010	TvdM	MO


D

C


B

A

PROTECTION SIDE

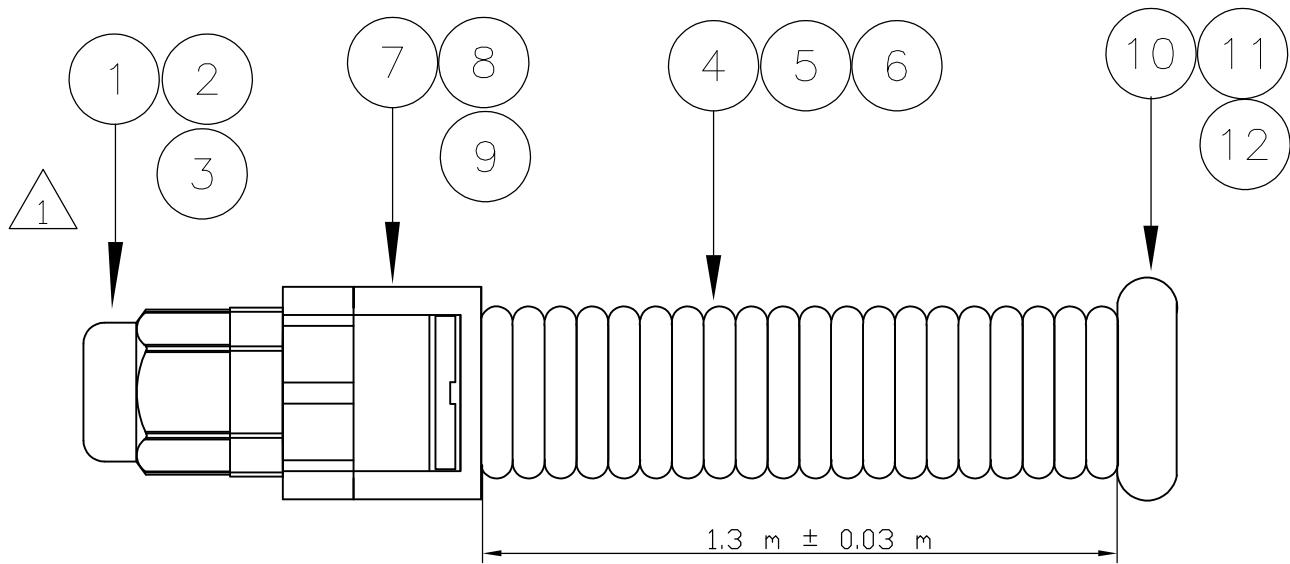



PULL SIDE △3

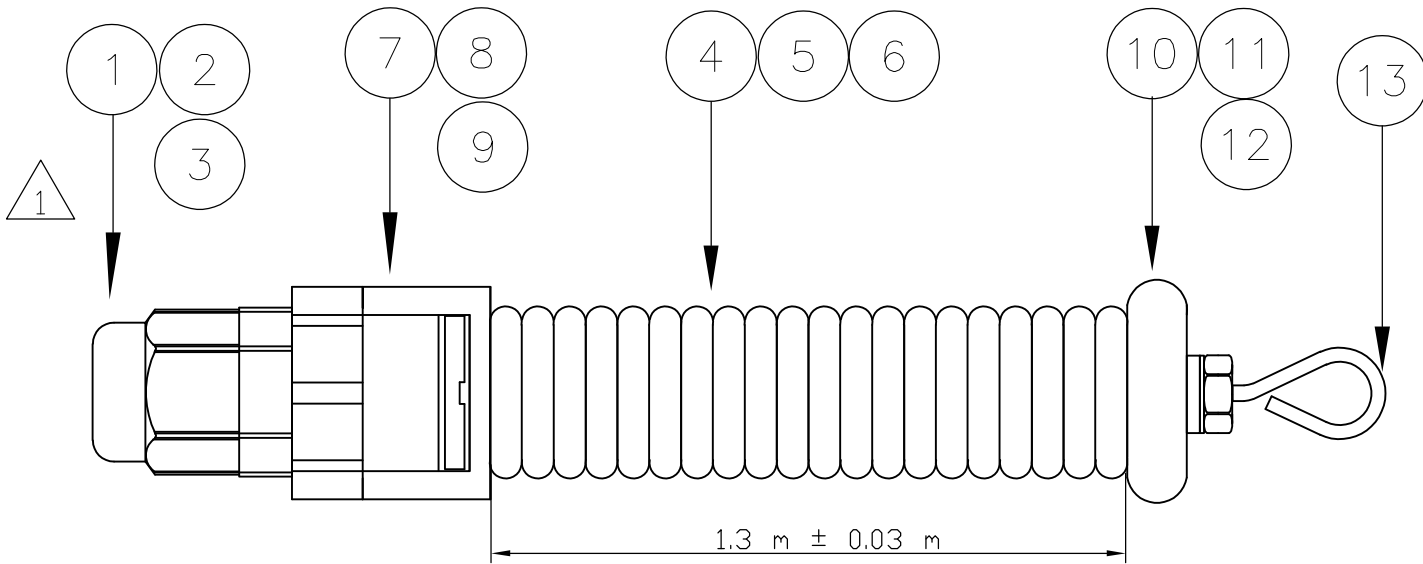

NOTES:

- △1 EACH KIT CONTAINS ONE PROTECTION AND ONE PULL TUBE.
- 2 INSTALL THE PROTECTION AND PULL TUBE ACC. TO SPECIFICATION 411–19470
- △3 PULL SIDE
 - PULL STRENGTH < 200 N
- △4 KITS ARE AVAILABLE WITH THREE DIFFERENT DIMENSIONS:
 - PG 21:
 - FOR 12 AND 24 FOLD CABLE ASSEMBLIES WITH ONE OR TWO MPO CONNECTOR ON BOTH SIDES.
 - FOR 12 FOLD CABLE ASSEMBLIES WITH 12 SINGLE CONNECTORS ON BOTH SIDES OR IN COMBINATION WITH MPO CONNECTOR.
 - PG 29:
 - FOR 24 FOLD CABLE ASSEMBLIES WITH 24 SINGLE CONNECTORS ON BOTH SIDES.
 - OR IN COMBINATION WITH MPO CONNECTORS.
 - PG 36:
 - FOR 48 AND 72 FOLD CABLE ASSEMBLIES WITH 4 OR 6 MPO CONNECTORS ON BOTH SIDES.
 - PG 36:
 - FOR 96 AND 144 FOLD CABLE ASSEMBLIES WITH MPO CONNECTORS.

△4	△4	△4		
PG36	PG29	PG21		
1	1	1	FOAC PULL EYE	13
2	—	—	FOAC END CAP PG 36	12
—	2	—	FOAC END CAP PG 29	11
—	—	2	FOAC END CAP PG 21	10
2	—	—	FOAC STRAIGHT CONNECTOR PG 36	9
—	2	—	FOAC STRAIGHT CONNECTOR PG 29	8
—	—	2	FOAC STRAIGHT CONNECTOR PG 21	7
1.3m	—	—	FOAC RIBBLE TUBE PG 36	6
—	1.3m	—	FOAC RIBBLE TUBE PG 29	5
—	—	1.3m	FOAC RIBBLE TUBE PG 21	4
2	—	—	FOAC CABLE GLAND PG 36	3
—	2	—	FOAC CABLE GLAND PG 29	2
—	—	2	FOAC CABLE GLAND PG 21	1

PARTNUMBER		-3	-2	-1	Description			Item			
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	11JUNE2010		 Tyco Electronics Corporation 's-Hertogenbosch, Nederland				
				CHK	11JUNE2010						
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD		NAME					
mm				T.vd MEULEN		FOAC FIBER OPTIC PROTECTION / PULL KIT					
		0 PLC ± -		PRODUCT SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
		1 PLC ± -		—							
		2 PLC ± -		APPLICATION SPEC							
		3 PLC ± -		—							
4 PLC ± -		ANGLES ± -		WEIGHT		A2		00779		C=2055567	
MATERIAL		FINISH		—		CUSTOMER DRAWING		SCALE		SHEET	
—		—						NTS		1 of 1	
										REV	
										A	