


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2		H	ECR-13-001734	01MAR2013	LD	JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	24 AWG Solid
	Ø RANGE in mm	0,485<=Ø<0,545
	MATERIAL	COPPER
	PLATING	BARE
	ELONGATION	15% PER EN 50288-1
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,00
DRAIN WIRE	WIRE AWG	-
	MATERIAL	-
	PLATING	-
	ELONGATION	-
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	-
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	COPPER BRAID
	PLATING	TINNED
	COVERAGE	40% APPROX.
	ELONGATION	15% PER EN 50288-1
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D)	6,5 mm
PULLING FORCE	MAX.	100 N

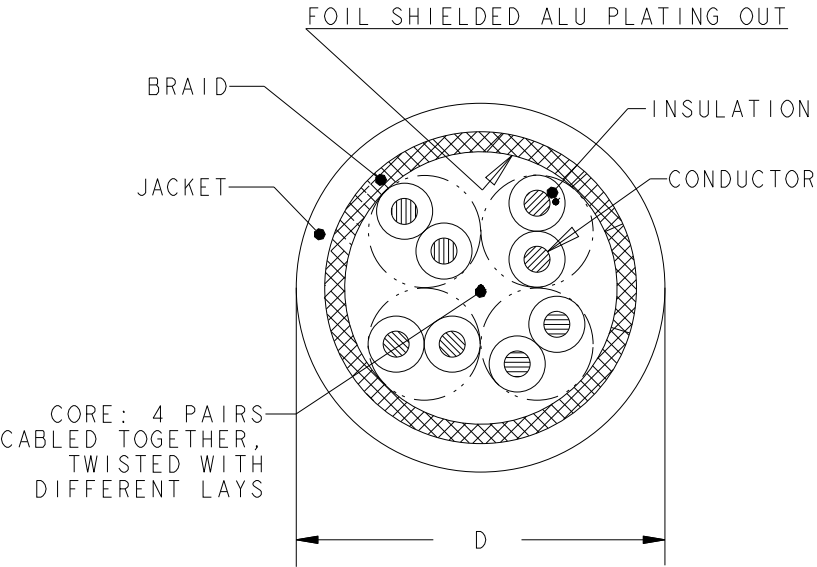

1. REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
2. BASENR SPECIFIC PRINT LEGEND INFO:
CAT5E SF/UTP SOLID PR04 AWG24 LSZH
3. CABLE COLORED TYPES UPON REQUEST.

WHITE	500	REEL	219484-2
WHITE	1000	REEL	219484-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH -

MATERIAL -

DWN L. de Dios 01Mar2013

CHK M. Maqueda 01Mar2013

APVD J. Sanabra 01Mar2013

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

TE Connectivity

NAME
CABLE, CAT5E, SF/UTP, SOLID, PR04, AWG24, LSZH

SIZE A3

CAGE CODE -

DRAWING NO. C-219484

RESTRICTED TO -

CUSTOMER DRAWING

SCALE NTS

SHEET 1 OF 1

REV H